


24 second shot clock (digits from 0 to 99, 20 cm high) and red light (diam. 8 cm.)

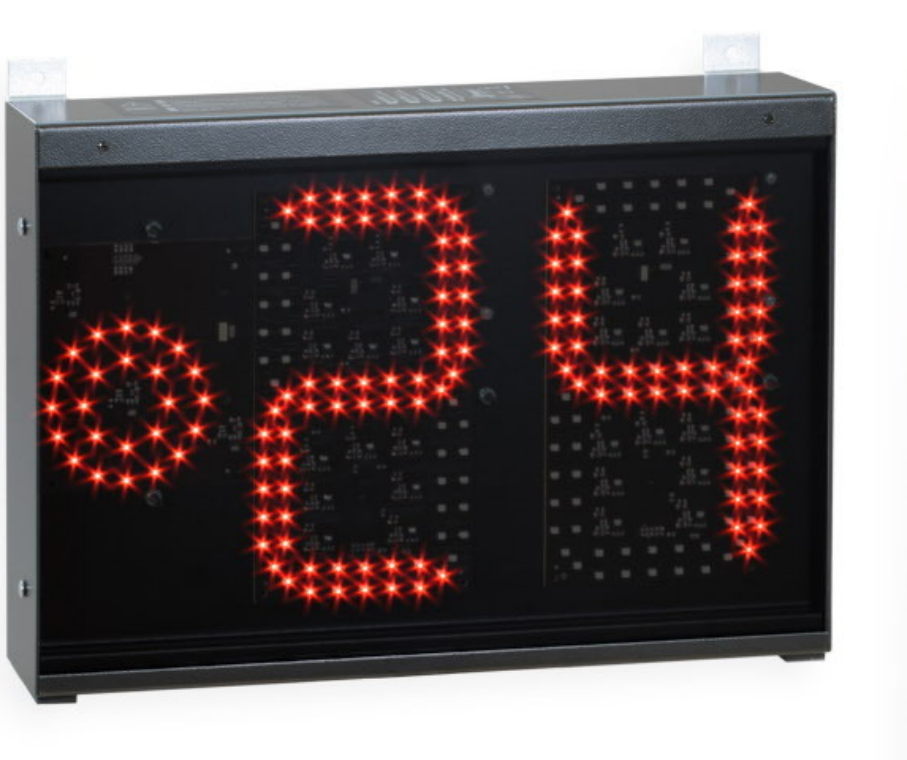

Supplied with serial cable to connect to the Control Console (see ACCESSORIES) or to the electronic scoreboard above it, depending on which type of cabling is more convenient. Serial cable is 50m long or chose from different lengths when ordering. Alternatively, a Radio Receiver is available (art.265-20) that allows you to save on the cable costs (see ACCESSORIES).

Robust container made from powder-coated steel. Front panel made from anti-glare polycarbonate. It is provided with 4 wall brackets and a revolving support stirrup at the base for an easy positioning on the floor.

Views are easily accessible from the front, built with high-quality, wide-angle SMD LEDs with an average life of 100,000 hours!

The horn can be sounded manually or automatically at the end of the 24 seconds, producing a strong acoustic signal (120dB at 1m) with adjustable duration and intensity. The sound of the horn is different from the one made by the game timer.

Red light goes on automatically at the end of the game time and the 24 seconds.

Optional anti-moisture coating of the electronic boards, recommended for swimming-pool and ice-rink installations. Please specify this option when ordering.

It can be used together with other models for creating large scoreboards displaying various information

Console ART-8485 Excluded

